# Web "High Frequency Ceramic Solutions"

#### 802.11 Dual Band 2.45/5 GHz Mini Chip Antenna. WiFi, Wireless LAN, | P/N 2450AD14A5500

Detail Specification: 10/20/2016 Page 1 of 6

This is the Web version of this datasheet, for the full datasheet, please contact us at: www.johansontechnology.com/ask-a-question

<b>General Specifica</b>	tions			
Part Number	2450AD	0AD14A5500		
Frequency (MHz)	2400 - 2480	5150 - 5850		
Ave. Rad Efficiency	60%	80%		
Peak Gain (dBi typ.)	1.0 dBi typ. (XZ-Total)	4.0 dBi typ. (XZ-Total)		
Average Gain (dBi typ.)	-3.5 dBi typ. (XZ-Total)	-2.5 dBi typ. (XZ-Total)		
Return Loss (dB)	6 min.	6 min.		
Impedance	50 Ω			

Let us help you with the antenna design, optimization, and tuning! www.johansontechnology.com/ipc-antenna-services



(dBi typ.)	(XZ-Total) (XZ-Total)		Storage Period	18 months max.
Return Loss (dB)	6 min. 6 min.		Storage Temperature	-40 to +85°C
Impedance	50	Ω	Operating Temperature	-40 to +85°C
Input Power	2 Watts n	nax. (CW)	Reel Quantity	4000

Part Number Explanation				
		Bulk (loose)	Suffix = S	e.g. 2450AD14A5500S
P/N Suffix	Packing Style	T&R	Suffix = T	e.g. 2450AD14A5500T
P/N Sullix		100% Tin	Suffix = $T$ or $S$	e.g. 2450AD14A5500(T or S)
	<b>Evaluation Board</b>	2450AD14A5500-EB1SMA & 2450AD14A5500-EB2SMA		

Mechanical Dimensions							
		In			mm		<u> </u>
L	0.063	±	0.004	1.60	±	0.10	\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\
W	0.031	±	0.004	0.80	±	0.10	W
T	0.016		max.	0.40		max.	
							Top View  Side View

Terminal Configuration				
No.	Function			
1	GND			
2	FEED			
3	NC			
4	NC			
	4			
	① ② ③			

If you'd like the complete datasheet which includes detailed gain performance, layout guidelines, application notes, small WiFi application layout, send us as message at:

www.johansontechnology.com/ask-a-question

As a bonus, you'll be assigned an RF Engineer to assist you in the design for free!




# Websicon "High Frequency Ceramic Solutions"

802.11 Dual Band 2.45/5 GHz Mini Chip Antenna. WiFi, Wireless LAN, IoT P/N 2450AD14A5500

Detail Specification: 10/20/2016 Page 2 of 7

This is the Web version of this datasheet, for the full datasheet, please contact us at: www.johansontechnology.com/ask-a-question

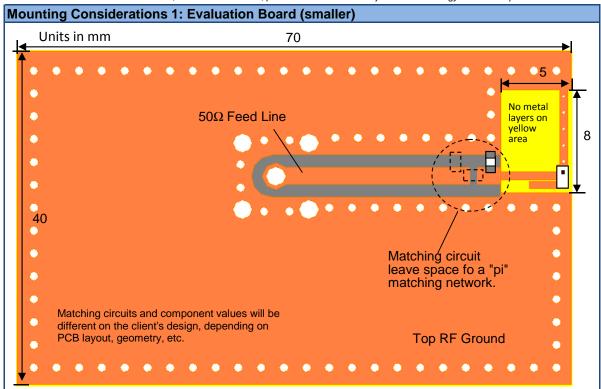

# To order a pre-tuned $50\Omega$ EVB with a female SMA connector click here: www.johansontechnology.com/request-a-sample

Would you like the layout file of the above? Have antenna tuning issues?

Please contact us if you have any questions regarding the implementation of this antenna in your PCB's layout. We'll be happy to guide you to maximize the antenna's performance. Contact our applications engineers at:

www.johansontechnology.com/ask-a-question

If you'd like the complete datasheet which includes detailed gain performance, layout guidelines, application notes, small WiFi application layout, send us as message at:

www.johansontechnology.com/ask-a-question
As a bonus, you'll be assigned an RF Engineer to assist you in the design for free!






## "High Frequency Ceramic Solutions"

802.11 Dual Band 2.45/5 GHz Mini Chip Antenna. WiFi, Wireless LAN, IoT P/N 2450AD14A5500

Detail Specification: 10/20/2016 Page 3 of 6

This is the Web version of this datasheet, for the full datasheet, please contact us at: www.johansontechnology.com/ask-a-question

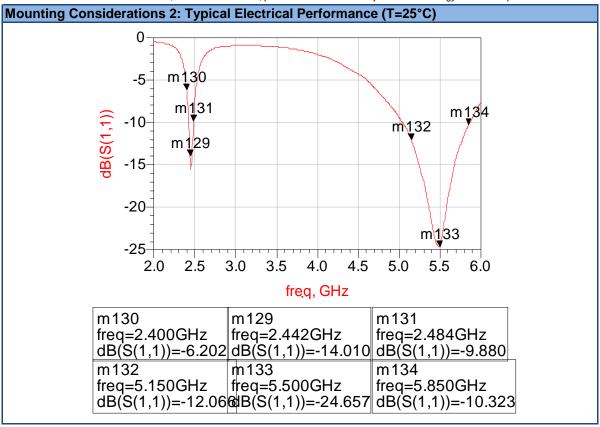

If you'd like the complete datasheet which includes detailed gain performance, layout guidelines, application notes, small WiFi application layout, send us as message at:

www.johansontechnology.com/ask-a-question
As a bonus, you'll be assigned an RF Engineer to assist you in the design for free!






#### "High Frequency Ceramic Solutions"

802.11 Dual Band 2.45/5 GHz Mini Chip Antenna. WiFi, Wireless LAN, IoT P/N 2450AD14A5500

Detail Specification: 10/20/2016 Page 4 of 6

This is the Web version of this datasheet, for the full datasheet, please contact us at: www.johansontechnology.com/ask-a-question

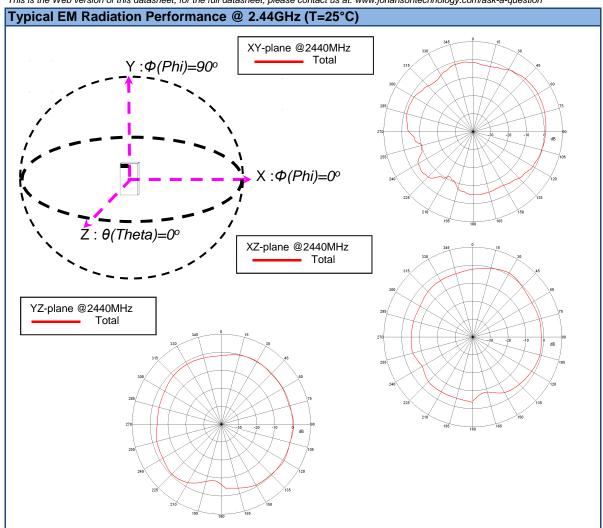

If you'd like the complete datasheet which includes detailed gain performance, layout guidelines, application notes, small WiFi application layout, send us as message at:

www.johansontechnology.com/ask-a-question
As a bonus, you'll be assigned an RF Engineer to assist you in the design for free!






### "High Frequency Ceramic Solutions"

802.11 Dual Band 2.45/5 GHz Mini Chip Antenna. WiFi, Wireless LAN, IoT P/N 2450AD14A5500

Detail Specification: 10/20/2016 Page 5 of 6

This is the Web version of this datasheet, for the full datasheet, please contact us at: www.johansontechnology.com/ask-a-question

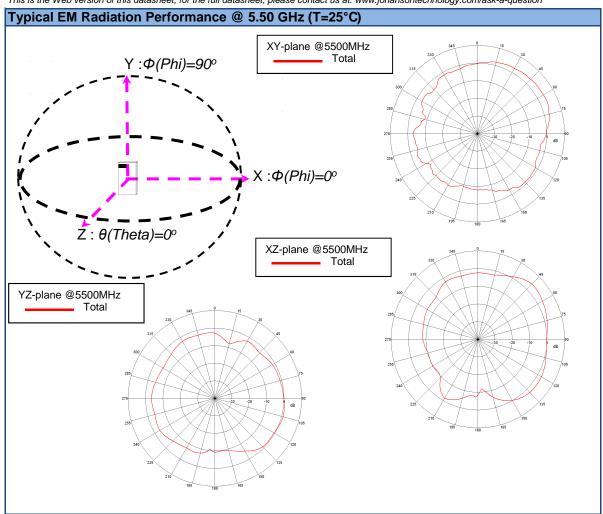

If you'd like the complete datasheet which includes detailed gain performance, layout guidelines, application notes, small WiFi application layout, send us as message at:

www.johansontechnology.com/ask-a-question
As a bonus, you'll be assigned an RF Engineer to assist you in the design for free!

Johanson Technology, Inc. reserves the right to make design changes without notice. All sales are subject to Johanson Technology, Inc. terms and conditions.



Ver. 1.1

www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver. 1.1



802.11 Dual Band 2.45/5 GHz Mini Chip Antenna. WiFi, Wireless LAN, IoT P/N 2450AD14A5500

10/20/2016 Page 6 of 6 Detail Specification:

This is the Web version of this datasheet, for the full datasheet, please contact us at: www.johansontechnology.com/ask-a-question
Antenna tuning, optimization, and validation services:
www.johansontechnology.com/ipc-antenna-services
For more antennas and to download measured S-parameters, go to:
www.johansontechnology.com/antennas
For more information about our diplexers:
www.johansontechnology.com/diplexers
Soldering Information
www.johansontechnology.com/ipcsoldering-profile
MSL Info
http://www.johansontechnology.com/msl-rating
Packaging information
www.johansontechnology.com/tape-reel-packaging
For layout review contact our Applications Team at:
www.johansontechnology.com/ask-a-question
RoHS Compliance
www.johansontechnology.com/rohs-compliance

Need help designing the antenna in? Use our antenna design services! www.johansontechnology.com/ipc-antenna-services 2 Free layout reviews and if you need us to tune and characterize the antenna on your product (inside anechoic chamber) we can do that too. Small lab fee may apply for the latter.

If you'd like the complete datasheet which includes detailed gain performance, layout guidelines, application notes, small WiFi application layout, send us as message at:

www.johansontechnology.com/ask-a-question As a bonus, you'll be assigned an RF Engineer to assist you in the design for free!

