

LED Light Engine, 3.7" Round Module

Constant-Current DC Array, 9 LED Series x 4 Parallel Strings Engineered by Norlux 36 Nichia LEDs 5 yr. Warranty

Specifications

Driver Type: Constant-Current
Drive Current: 350mA Nominal

Nom. Forward Voltage: 26.8V

Total Board Power: 9.4W Nominal

Life: 50,000 Hrs, 70% lumen maint.

@ Ta max 40°C, used as specified

Max Junction Temp: 90°C Max Test Point Temp: 80°C

Operating Temp: -40°C to +60°C Ambient

Storage Temp: -40°C to +80°C

Viewing Angle (FWHM): 120° Lambertian distribution

CRI: 83 typical


Designed for easy use in standard luminaires	•	Designed to	or easy	use in	standard	iuminaires
--	---	-------------	---------	--------	----------	------------

- Tight LED pitch eliminates pixelization, no complex lens or optics required
- Color: 1/4 ANSI Binning, 3 Step MacAdam Ellipse
- Suggested Applications: Commercial or Residential Downlights
- Customizable: Engines can be modified to your application. Contact us.



	3.7 Inch Round DC LED Module @ 350mA					
	Model Number	Total Board Power (W)	Total Current (mA)	Color Temp (K)	Lumens (± 15%)	Board LPW
I	98017	9.4	350	2700	1,150	123
١	98018	9.4	350	3000	1,230	131
	98019	9.4	350	3500	1,290	137
١	98020	9.4	350	4000	1,320	141
I	98032	9.4	350	5000	1,360	145

Dimensions:

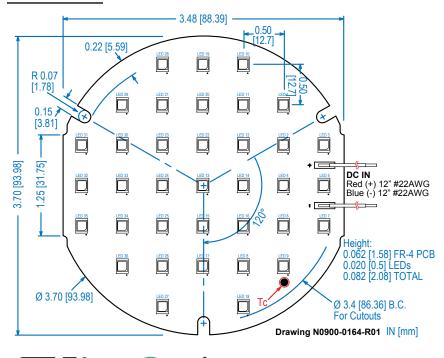

Connectivity Options			
Suffix Connection			
(blank)	12 IN, #22 AWG Stranded Leads		
-01	No Leads		
-02	Push-in Connectors		

For Poke-In Connectors, use #24-18 AWG stranded or solid wire







★ MADE IN USA ★
Of Imported And Domestic Components

Specifications subject to change without notice. Trademarks are property of their respective owners.

Rev 5-14-15



3.7" Round Std. DC **LED Light Engine Module**

SSL Solutions Faster Than The Speed Of Light®

Pg 2 of 2

CIE Chromaticity Coordinates:

2700K

3 Step Macadams Ellipse

3000K

3 Step Macadams Ellipse

3500K

3 Step Macadams Ellipse

4000K

3 Step Macadams Ellipse

5000K

3 Step Macadams Ellipse

Х	Υ
0.4576	0.4183
0.4698	0.4212
0.4478	0.3999
0.4591	0.4025

X	Υ
0.4325	0.4101
0.4452	0.4146
0.4244	0.3923
0.4362	0.3965


X	Υ
0.4045	0.3975
0.4189	0.4044
0.3989	0.3819
0.412	0.3875

Parallel

Υ
0.3836
0.3906
0.3687
0.3757

Х	Υ
0.3408	0.3461
0.3485	0.3520
0.3416	0.3585
0.3499	0.3644

Relative Luminous Flux / Tc Temperature

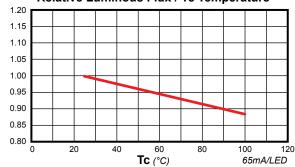

Compatible TRP Drivers:

The drivers listed here are all compatible with this module. Choose the best driver for your application.

- LED12W-36-C0350
- LED20W-40-C0350-LE
- LFD20W-40-C0350-TF
- LED20W-57-C0350
- LED20W-57-C0350-D

Step Dimming:

This Light Engine can be step-dimmed, with a recommended TRP dimmable driver and SD series step-dimming module. See the SD2 or SD3 data sheet for wiring information.


Series/Parallel Configurations

Parallel: The positive and negative of one board is connected to the respective positive and negative of the next. Current adds, so the supply must be 2x the current for 2 boards.

Series:

The negative of one board is connected to the positive of the next. Voltage adds, so the supply must be 2x the voltage for 2 boards.

пппп Constant Current ____ ,00000 Driver ____ -----



Maximum Run Lengths

The max number of boards wired in a chain (series) is limited by the max current rating of the first board wired to the driver. The sum of the board currents, in the chain, funnels through the first board. Multiple chains can connect directly to the power supply in parallel. See table for max chain length.

Duaduat	Carias/Danallal	Max Allowable	Boards
<u>Product</u>	Series/Parallel	High Current (Nom)	Low Current
3.7" Round	Series	10	N/A

Mounting Notes

The LED assembly is supplied with mounting holes, per the dimensional drawing. It is important to mount the board in such a way as to maintain the Tc point below the max. The steady state thermals in application will dictate if the board needs to be mounted directly to metallic housing and/or include a thermal pad. For example fully enclosed recessed fixture will require better thermal mounting than an open air pendant.

Thermal Application Notes

This board requires additional heat sinking to run above 45°C ambient at nominal specifications. Heat sink is also required when operated above specified drive currents.

Maximum Current

Max Current: 720mA

Voltage at max current: 30V, Power at max current: 21.6W

The total maximum current reflects the LED maximum forward current only, without considering thermal needs. Driving the LEDs this hard will likely violate their thermal limits, depending on the application. Tc point must remain at or below the max temperature, or the warranty will be voided. Temperature is directly correlated to LED current.

Static Sensitive Device

Handle only at static-safe work stations.

Packaging

50 per box standard.